

Pro informace o L, L3 a L4max. použijte rozkládací tabulku karbidových vrtáků.

■ B966A/B967A • ~3 x D/~5 x D



průměr D1



● první volba
○ alternativní volba

krátké • KC7315	dlouhé • KC7315	mm	palce	L5	LS	D
B966A03000	B967A03000	3,000	.1181	0,5	36	6
B966A03100	B967A03100	3,100	.1220	0,5	36	6
B966A03200	B967A03200	3,200	.1260	0,5	36	6
B966A03300	B967A03300	3,300	.1299	0,5	36	6
B966A03400	–	3,400	.1339	0,6	36	6
B966A03500	B967A03500	3,500	.1378	0,6	36	6
B966A03600	–	3,600	.1417	0,6	36	6
B966A03700	–	3,700	.1457	0,6	36	6
B966A03800	B967A03800	3,800	.1496	0,6	36	6
B966A03900	–	3,900	.1535	0,6	36	6
B966A03960	–	3,960	.1559	0,7	36	6
B966A04000	B967A04000	4,000	.1575	0,7	36	6
B966A04100	–	4,100	.1614	0,7	36	6
B966A04200	B967A04200	4,200	.1654	0,7	36	6
B966A04300	B967A04300	4,300	.1693	0,7	36	6
B966A04400	–	4,400	.1732	0,7	36	6
B966A04500	B967A04500	4,500	.1772	0,7	36	6
B966A04600	–	4,600	.1811	0,8	36	6
B966A04700	–	4,700	.1850	0,8	36	6
B966A04800	B967A04800	4,800	.1890	0,8	36	6
B966A04900	–	4,900	.1929	0,8	36	6
B966A05000	B967A05000	5,000	.1969	0,8	36	6
B966A05040	–	5,040	.1984	0,8	36	6
B966A05100	B967A05100	5,100	.2008	0,8	36	6
B966A05200	B967A05200	5,200	.2047	0,9	36	6
B966A05300	–	5,300	.2087	0,9	36	6
B966A05400	–	5,400	.2126	0,9	36	6
B966A05500	B967A05500	5,500	.2165	0,9	36	6
B966A05600	–	5,600	.2205	0,9	36	6
B966A05700	–	5,700	.2244	1,0	36	6
B966A05800	B967A05800	5,800	.2283	1,0	36	6
B966A05900	–	5,900	.2323	1,0	36	6
B966A06000	B967A06000	6,000	.2362	1,0	36	6
B966A06050	–	6,050	.2382	1,0	36	8
B966A06100	B967A06100	6,100	.2402	1,0	36	8
B966A06200	–	6,200	.2441	1,0	36	8

(pokračování na další straně)

(B966A/B967A • ~3 x D/~5 x D — pokračování)

Karbidové vrtáky



 		průměr D1				
krátké • KC7315	dlouhé • KC7315	mm	palce	L5	LS	D
B966A06300	–	6,300	.2480	1,1	36	8
B966A06350	–	6,350	.2500	1,1	36	8
B966A06400	–	6,400	.2520	1,1	36	8
B966A06500	B967A06500	6,500	.2559	1,1	36	8
B966A06600	B967A06600	6,600	.2598	1,1	36	8
B966A06700	B967A06700	6,700	.2638	1,1	36	8
B966A06800	B967A06800	6,800	.2677	1,1	36	8
B966A06900	–	6,900	.2717	1,2	36	8
B966A07000	B967A07000	7,000	.2756	1,2	36	8
B966A07100	–	7,100	.2795	1,2	36	8
B966A07200	–	7,200	.2835	1,2	36	8
B966A07300	–	7,300	.2874	1,2	36	8
B966A07400	B967A07400	7,400	.2913	1,3	36	8
B966A07500	B967A07500	7,500	.2953	1,3	36	8
B966A07600	–	7,600	.2992	1,3	36	8
B966A07700	–	7,700	.3031	1,3	36	8
B966A07800	B967A07800	7,800	.3071	1,3	36	8
B966A07900	–	7,900	.3110	1,3	36	8
B966A08000	B967A08000	8,000	.3150	1,4	36	8
B966A08100	B967A08100	8,100	.3189	1,4	40	10
B966A08200	–	8,200	.3228	1,4	40	10
B966A08300	–	8,300	.3268	1,4	40	10
B966A08400	–	8,400	.3307	1,4	40	10
B966A08500	B967A08500	8,500	.3346	1,4	40	10
B966A08600	B967A08600	8,600	.3386	1,5	40	10
B966A08700	B967A08700	8,700	.3425	1,5	40	10
B966A08800	B967A08800	8,800	.3465	1,5	40	10
B966A08900	–	8,900	.3504	1,5	40	10
B966A09000	B967A09000	9,000	.3543	1,5	40	10
B966A09100	–	9,100	.3583	1,5	40	10
B966A09200	–	9,200	.3622	1,6	40	10
B966A09300	B967A09300	9,300	.3661	1,6	40	10
B966A09400	–	9,400	.3701	1,6	40	10
B966A09500	B967A09500	9,500	.3740	1,6	40	10
B966A09600	–	9,600	.3780	1,6	40	10
B966A09700	–	9,700	.3819	1,7	40	10
B966A09800	B967A09800	9,800	.3858	1,7	40	10
B966A09900	–	9,900	.3898	1,7	40	10
B966A10000	B967A10000	10,000	.3937	1,7	40	10
B966A10100	–	10,100	.3976	1,7	45	12
B966A10200	B967A10200	10,200	.4016	1,7	45	12
B966A10300	–	10,300	.4055	1,8	45	12
B966A10400	–	10,400	.4094	1,8	45	12
B966A10500	B967A10500	10,500	.4134	1,8	45	12
B966A10600	–	10,600	.4173	1,8	45	12
B966A10700	B967A10700	10,700	.4213	1,8	45	12
B966A10800	B967A10800	10,800	.4252	1,8	45	12
B966A10900	–	10,900	.4291	1,9	45	12
B966A11000	B967A11000	11,000	.4331	1,9	45	12
B966A11100	–	11,100	.4370	1,9	45	12
B966A11200	–	11,200	.4409	1,9	45	12
B966A11300	B967A11300	11,300	.4449	1,9	45	12

- první volba
- alternativní volba

(pokračování na další straně)

(B966A/B967A • ~3 x D/~5 x D — pokračování)

Karbidové vrtáky




- první volba
- alternativní volba

průměr D1

krátké • KC7315	dlouhé • KC7315	mm	palce	L5	LS	D
B966A11400	–	11,400	.4488	2,0	45	12
B966A11500	B967A11500	11,500	.4528	2,0	45	12
B966A11600	–	11,600	.4567	2,0	45	12
B966A11700	–	11,700	.4606	2,0	45	12
B966A11800	B967A11800	11,800	.4646	2,0	45	12
B966A11900	–	11,900	.4685	2,0	45	12
B966A12000	B967A12000	12,000	.4724	2,1	45	12
B966A12100	–	12,100	.4764	2,1	45	14
B966A12200	–	12,200	.4803	2,1	45	14
B966A12300	–	12,300	.4843	2,1	45	14
B966A12400	–	12,400	.4882	2,1	45	14
B966A12500	B967A12500	12,500	.4921	2,1	45	14
B966A12600	–	12,600	.4961	2,2	45	14
B966A12700	B967A12700	12,700	.5000	2,2	45	14
B966A12800	B967A12800	12,800	.5039	2,2	45	14
B966A12900	–	12,900	.5079	2,2	45	14
B966A13000	B967A13000	13,000	.5118	2,2	45	14
B966A13100	–	13,100	.5157	2,3	45	14
B966A13200	–	13,200	.5197	2,3	45	14
B966A13300	–	13,300	.5236	2,3	45	14
B966A13400	–	13,400	.5276	2,3	45	14
B966A13500	B967A13500	13,500	.5315	2,3	45	14
B966A13700	–	13,700	.5394	2,4	45	14
B966A14000	B967A14000	14,000	.5512	2,4	45	14
B966A14200	–	14,200	.5591	2,5	48	16
B966A14300	–	14,300	.5630	2,5	48	16
B966A14500	B967A14500	14,500	.5709	2,5	48	16
B966A14700	–	14,700	.5787	2,5	48	16
B966A14800	–	14,800	.5827	2,6	48	16
B966A15000	B967A15000	15,000	.5906	2,6	48	16
–	B967A15300	15,300	.6024	2,6	48	16
B966A15500	B967A15500	15,500	.6102	2,7	48	16
B966A15700	–	15,700	.6181	2,7	48	16
B966A16000	B967A16000	16,000	.6299	2,8	48	16
B966A16500	B967A16500	16,500	.6496	2,9	48	18
B966A17000	–	17,000	.6693	2,9	48	18
B966A17500	–	17,500	.6890	3,0	48	18
B966A18000	–	18,000	.7087	3,1	48	18
B966A20000	–	20,000	.7874	3,5	50	20

Tolerance • Metrické

Rozsah nominálních průměrů	Tolerance D1 m7	Tolerance D h6
>3–6	0,004/0,016	0,000/-0,008
>6–10	0,006/0,021	0,000/-0,009
>10–18	0,007/0,025	0,000/-0,011
>18–25,4	0,008/0,029	0,000/-0,013

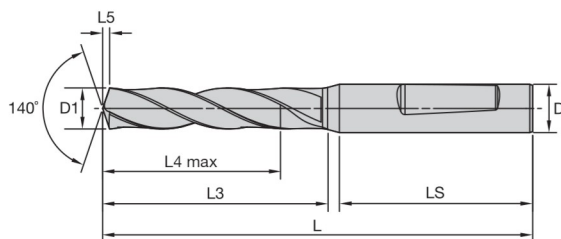

Karbidové vrtáky

■ B966F • ~3 x D



průměr D1


- první volba
- alternativní volba

krátké • KC7315	mm	in	L	L3	L4 max	L5	LS	D
B966F03000	3,000	.1181	62	20	14	0,5	36	6
B966F03300	3,300	.1299	62	20	14	0,5	36	6
B966F03400	3,400	.1339	62	20	14	0,6	36	6
B966F03500	3,500	.1378	62	20	14	0,6	36	6
B966F03600 *	3,600	.1417	62	20	14	0,6	36	6
B966F04000	4,000	.1575	66	24	17	0,7	36	6
B966F04200	4,200	.1654	66	24	17	0,7	36	6
B966F05000	5,000	.1969	66	28	20	0,8	36	6
B966F05100 *	5,100	.2008	66	28	20	0,8	36	6
B966F05300 *	5,300	.2087	66	28	20	0,9	36	6
B966F05500	5,500	.2165	66	28	20	0,9	36	6
B966F05600 *	5,600	.2205	66	28	20	0,9	36	6
B966F06000	6,000	.2362	66	28	20	1,0	36	6
B966F06300	6,300	.2480	79	34	24	1,1	36	8
B966F06400	6,400	.2520	79	34	24	1,1	36	8
B966F06500	6,500	.2559	79	34	24	1,1	36	8
B966F06700 *	6,700	.2638	79	34	24	1,1	36	8
B966F06800	6,800	.2677	79	34	24	1,1	36	8
B966F07000	7,000	.2756	79	34	24	1,2	36	8
B966F07100 *	7,100	.2795	79	41	29	1,2	36	8
B966F07300 *	7,300	.2874	79	41	29	1,2	36	8
B966F07400 *	7,400	.2913	79	41	29	1,3	36	8
B966F07600 *	7,600	.2992	79	41	29	1,3	36	8
B966F08000	8,000	.3150	79	41	29	1,4	36	8
B966F08200	8,200	.3228	89	47	35	1,4	40	10
B966F08400	8,400	.3307	89	47	35	1,4	40	10
B966F08500	8,500	.3346	89	47	35	1,4	40	10
B966F09000	9,000	.3543	89	47	35	1,5	40	10
B966F09100	9,100	.3583	89	47	35	1,5	40	10
B966F09500	9,500	.3740	89	47	35	1,6	40	10
B966F10000	10,000	.3937	89	47	35	1,7	40	10
B966F10200	10,200	.4016	102	55	40	1,7	45	12
B966F10400	10,400	.4094	102	55	40	1,8	45	12
B966F10500	10,500	.4134	102	55	40	1,8	45	12
B966F10600	10,600	.4173	102	55	40	1,8	45	12
B966F10700	10,700	.4213	102	55	40	1,8	45	12

(pokračování na další straně)

(B966F • ~3 x D — pokračování)

Karbidové vrtáky



● první volba
○ alternativní volba

krátké • KC7315	průměr D1							
	mm	palce	L	L3	L4 max	L5	LS	D
B966F10800	10,800	.4252	102	55	40	1,8	45	12
B966F11000	11,000	.4331	102	55	40	1,9	45	12
B966F11800	11,800	.4646	102	55	40	2,0	45	12
B966F12000	12,000	.4724	102	55	40	2,1	45	12
B966F12100 *	12,100	.4764	107	60	43	2,1	45	14
B966F12200	12,200	.4803	107	60	43	2,1	45	14
B966F12500	12,500	.4921	107	60	43	2,1	45	14
B966F12700	12,700	.5000	107	60	43	2,2	45	14
B966F13000	13,000	.5118	107	60	43	2,2	45	14
B966F13500 *	13,500	.5315	107	60	43	2,3	45	14
B966F14000	14,000	.5512	107	60	43	2,4	45	14
B966F14500	14,500	.5709	115	65	45	2,5	48	16
B966F15000	15,000	.5906	115	65	45	2,6	48	16
B966F16000	16,000	.6299	115	65	45	2,8	48	16
B966F16500	16,500	.6496	123	73	51	2,9	48	18
B966F17000	17,000	.6693	123	73	51	2,9	48	18
B966F17500 *	17,500	.6890	123	73	51	3,0	48	18
B966F18000	18,000	.7087	123	73	51	3,1	48	18

POZNÁMKA: *Platí standardní ceny, dodací termíny a minimální objednané množství MOQ. Standardní položka na objednávku.

Tolerance • Metrické

Rozsah nominálních průměrů	Tolerance D1 m7	Tolerance D h6
>3–6	0,004/0,016	0,000/-0,008
>6–10	0,006/0,021	0,000/-0,009
>10–18	0,007/0,025	0,000/-0,011
>18–25,4	0,008/0,029	0,000/-0,013