

■ B978A • ~8 x D




průměr D1

● první volba
○ alternativní volba

extra dlouhé • KC7315	mm	palce	L	L3	L4 max	L5	LS	D
B978A03000	3,000	.1181	78	40	33	0,6	36	6
B978A03300	3,300	.1299	78	40	33	0,7	36	6
B978A03400	3,400	.1339	78	40	33	0,7	36	6
B978A03600	3,600	.1417	78	40	33	0,7	36	6
B978A03700	3,700	.1457	78	40	33	0,8	36	6
B978A03800	3,800	.1496	87	49	41	0,8	36	6
B978A03970	3,970	.1563	87	49	41	0,8	36	6
B978A04000	4,000	.1575	87	49	41	0,8	36	6
B978A04200	4,200	.1654	87	49	41	0,9	36	6
B978A04500	4,500	.1772	87	49	41	0,9	36	6
B978A04600	4,600	.1811	87	49	41	0,9	36	6
B978A04763	4,763	.1875	94	56	48	1,0	36	6
B978A04800	4,800	.1890	94	56	48	1,0	36	6
B978A05000	5,000	.1969	94	56	48	1,0	36	6
B978A05100	5,100	.2008	94	56	48	1,1	36	6
B978A05200	5,200	.2047	94	56	48	1,1	36	6
B978A05300	5,300	.2087	94	56	48	1,1	36	6
B978A05500	5,500	.2165	94	56	48	1,1	36	6
B978A05558	5,558	.2188	94	56	48	1,2	36	6
B978A05600	5,600	.2205	94	56	48	1,2	36	6
B978A05700	5,700	.2244	94	56	48	1,2	36	6
B978A05800	5,800	.2283	94	56	48	1,2	36	6
B978A05900	5,900	.2323	94	56	48	1,2	36	6
B978A06000	6,000	.2362	94	56	48	1,2	36	6
B978A06100	6,100	.2402	105	67	57	1,3	36	8
B978A06200	6,200	.2441	105	67	57	1,3	36	8
B978A06300	6,300	.2480	105	67	57	1,3	36	8
B978A06350	6,350	.2500	105	67	57	1,3	36	8
B978A06400	6,400	.2520	105	67	57	1,3	36	8
B978A06500	6,500	.2559	105	67	57	1,4	36	8
B978A06600	6,600	.2598	105	67	57	1,4	36	8
B978A06700	6,700	.2638	105	67	57	1,4	36	8
B978A06746	6,746	.2656	105	67	57	1,4	36	8
B978A06800	6,800	.2677	105	67	57	1,4	36	8
B978A07000	7,000	.2756	105	67	57	1,5	36	8
B978A07145	7,145	.2813	110	72	61	1,5	36	8

(pokračování na další straně)

(B978A • ~8 x D — pokračování)



průměr D1


● první volba
○ alternativní volba

extra dlouhé • KC7315	mm	palce	L	L3	L4 max	L5	LS	D
B978A07400	7,400	.2913	110	72	61	1,6	36	8
B978A07500	7,500	.2953	110	72	61	1,6	36	8
B978A07541	7,541	.2969	110	72	61	1,6	36	8
B978A07700	7,700	.3031	110	72	61	1,6	36	8
B978A07800	7,800	.3071	110	72	61	1,6	36	8
B978A07938	7,938	.3125	110	72	61	1,7	36	8
B978A08000	8,000	.3150	110	72	61	1,7	36	8
B978A08100	8,100	.3189	122	80	68	1,7	40	10
B978A08200	8,200	.3228	122	80	68	1,7	40	10
B978A08334	8,334	.3281	122	80	68	1,8	40	10
B978A08500	8,500	.3346	122	80	68	1,8	40	10
B978A08600	8,600	.3386	122	80	68	1,8	40	10
B978A08700	8,700	.3425	122	80	68	1,8	40	10
B978A08733	8,733	.3438	122	80	68	1,8	40	10
B978A08800	8,800	.3465	122	80	68	1,9	40	10
B978A09000	9,000	.3543	122	80	68	1,9	40	10
B978A09100	9,100	.3583	122	80	68	1,9	40	10
B978A09129	9,129	.3594	122	80	68	1,9	40	10
B978A09300	9,300	.3661	122	80	68	2,0	40	10
B978A09500	9,500	.3740	122	80	68	2,0	40	10
B978A09525	9,525	.3750	122	80	68	2,0	40	10
B978A09700	9,700	.3819	122	80	68	2,0	40	10
B978A09750	9,750	.3839	122	80	68	2,1	40	10
B978A09800	9,800	.3858	122	80	68	2,1	40	10
B978A09900	9,900	.3898	122	80	68	2,1	40	10
B978A09921	9,921	.3906	122	80	68	2,1	40	10
B978A10000	10,000	.3937	122	80	68	2,1	40	10
B978A10100	10,100	.3976	141	94	79	2,1	45	12
B978A10200	10,200	.4016	141	94	79	2,2	45	12
B978A10300	10,300	.4055	141	94	79	2,2	45	12
B978A10320	10,320	.4063	141	94	79	2,2	45	12
B978A10500	10,500	.4134	141	94	79	2,2	45	12
B978A10716	10,716	.4219	141	94	79	2,3	45	12
B978A10800	10,800	.4252	141	94	79	2,3	45	12
B978A11000	11,000	.4331	141	94	79	2,3	45	12
B978A11113	11,113	.4375	141	94	79	2,4	45	12
B978A11200	11,200	.4409	141	94	79	2,4	45	12
B978A11300	11,300	.4449	141	94	79	2,4	45	12
B978A11400	11,400	.4488	141	94	79	2,4	45	12
B978A11500	11,500	.4528	141	94	79	2,4	45	12
B978A11509	11,509	.4531	141	94	79	2,4	45	12
B978A11700	11,700	.4606	141	94	79	2,5	45	12
B978A11800	11,800	.4646	141	94	79	2,5	45	12
B978A11908	11,908	.4688	141	94	79	2,5	45	12
B978A12000	12,000	.4724	141	94	79	2,5	45	12
B978A12304 *	12,304	.4844	155	108	91	2,6	45	14
B978A12500	12,500	.4921	155	108	91	2,7	45	14
B978A12700	12,700	.5000	155	108	91	2,7	45	14

(pokračování na další straně)

(B978A • ~8 x D — pokračování)

Karbidové vrtáky



● první volba
○ alternativní volba


extra dlouhé • KC7315	průměr D1							
	mm	palce	L	L3	L4 max	L5	LS	D
B978A12800	12,800	.5039	155	108	91	2,7	45	14
B978A13000	13,000	.5118	155	108	91	2,8	45	14
B978A13100	13,100	.5157	155	108	91	2,8	45	14
B978A13500	13,500	.5315	155	108	91	2,9	45	14
B978A14000	14,000	.5512	155	108	91	3,0	45	14
B978A14288	14,288	.5625	171	121	101	3,0	48	16
B978A14500	14,500	.5709	171	121	101	3,1	48	16
B978A15000	15,000	.5906	171	121	101	3,2	48	16
B978A15100	15,100	.5945	171	121	101	3,2	48	16
B978A15200	15,200	.5984	171	121	101	3,2	48	16
B978A15300	15,300	.6024	171	121	101	3,3	48	16
B978A15500	15,500	.6102	171	121	101	3,3	48	16
B978A15800	15,800	.6220	171	121	101	3,4	48	16
B978A15875	15,875	.6250	171	121	101	3,4	48	16
B978A16000	16,000	.6299	171	121	101	3,4	48	16
B978A16078	16,078	.6330	185	135	113	3,4	48	18
B978A16200	16,200	.6378	185	135	113	3,5	48	18
B978A16500	16,500	.6496	185	135	113	3,5	48	18
B978A17000	17,000	.6693	185	135	113	3,6	48	18
B978A17463	17,463	.6875	185	135	113	3,7	48	18
B978A17500	17,500	.6890	185	135	113	3,7	48	18
B978A18000	18,000	.7087	185	135	113	3,9	48	18
B978A18500	18,500	.7283	200	148	124	4,0	50	20
B978A19000	19,000	.7480	200	148	124	4,1	50	20
B978A19050 *	19,050	.7500	200	148	124	4,1	50	20
B978A19253 *	19,253	.7580	200	148	124	4,1	50	20
B978A19500 *	19,500	.7677	200	148	124	4,2	50	20
B978A19800	19,800	.7795	200	148	124	4,2	50	20
B978A19840	19,840	.7811	200	148	124	4,3	50	20
B978A20000	20,000	.7874	200	148	124	4,3	50	20

POZNÁMKA: Úhel špičky řady B978 je 132°.

*Platí standardní ceny, dodací termíny a minimální objednané množství MOQ. Standardní položka na objednávku.

Tolerance • Metrické

Rozsah nominálních průměrů	Tolerance D1 m7	Tolerance D h6
>3–6	0,004/0,016	0,000/-0,008
>6–10	0,006/0,021	0,000/-0,009
>10–18	0,007/0,025	0,000/-0,011
>18–25,4	0,008/0,029	0,000/-0,013

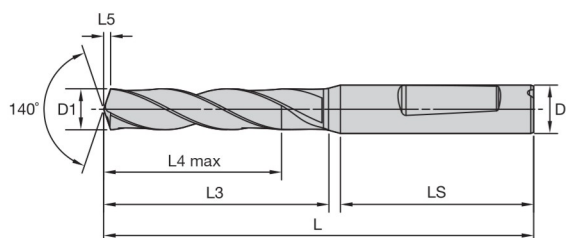

B978F • ~8 x D



průměr D1

● první volba
○ alternativní volba

extra dlouhé • KC7315	mm	palce	L	L3	L4 max	L5	LS	D
B978F03600	3,600	.1417	78	40	33	0,7	36	6
B978F04700 *	4,700	.1850	87	49	41	1,0	36	6
B978F05000	5,000	.1969	94	56	48	1,0	36	6
B978F06800	6,800	.2677	105	67	57	1,4	36	8
B978F07000	7,000	.2756	105	67	57	1,5	36	8
B978F07400 *	7,400	.2913	110	72	61	1,6	36	8
B978F07500	7,500	.2953	110	72	61	1,6	36	8
B978F08500	8,500	.3346	122	80	68	1,8	40	10
B978F09000	9,000	.3543	122	80	68	1,9	40	10
B978F09500	9,500	.3740	122	80	68	2,0	40	10
B978F10200	10,200	.4016	141	94	79	2,2	45	12
B978F12000	12,000	.4724	141	94	79	2,5	45	12
B978F12500 *	12,500	.4921	155	108	91	2,7	45	14
B978F13000	13,000	.5118	155	108	91	2,8	45	14
B978F14000	14,000	.5512	155	108	91	3,0	45	14
B978F14500 *	14,500	.5709	171	121	101	3,1	48	16
B978F15000	15,000	.5906	171	121	101	3,2	48	16
B978F16000	16,000	.6299	171	121	101	3,4	48	16
B978F17000 *	17,000	.6693	185	135	113	3,6	48	18
B978F17500	17,500	.6890	185	135	113	3,7	48	18
B978F18000 *	18,000	.7087	185	135	113	3,9	48	18
B978F20000 *	20,000	.7874	200	148	124	4,3	50	20

POZNÁMKA: Úhel špičky řady B978 je 132°.

*Platí standardní ceny, dodací termíny a minimální objednané množství MOQ. Standardní položka na objednávku.

Tolerance • Metrické

Rozsah nominálních průměrů	Tolerance D1 m7	Tolerance D h6
>3–6	0,004/0,016	0,000/-0,008
>6–10	0,006/0,021	0,000/-0,009
>10–18	0,007/0,025	0,000/-0,011
>18–25,4	0,008/0,029	0,000/-0,013